




REXO-THERM

ROT-150/M BHV

CONSTRUCTION HEATER

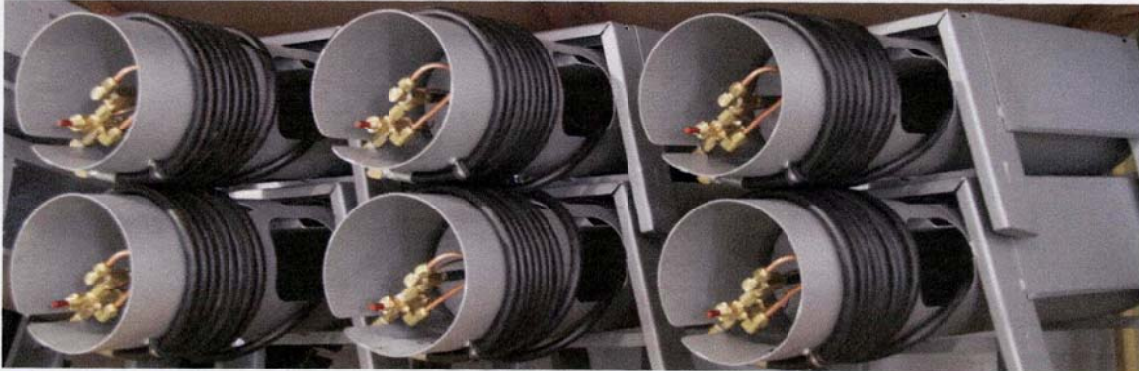

- * **INPUT: 150,000 Btuh. MAXIMUM ADJUSTABLE TO 70,000 Btuh minimum**
- * **Propane consumption at Maximum Input 7lbs per hour**
- * **Propane consumption at Minimum Input 3.25 lbs per hour**
- * **Stackable to reduce storage space and for easy transport**
- * **Unattended Operation - safety valve closes when flame fails**
- * **Operate without electricity**
- * **Rugged, solid construction -**
- * **Overall Dimensions Length 36 inches: Width 13 inches: Height 15 inches**
- * **Weight with hose 35 lbs**
- * **Comes complete with 19 1/2 foot hose, regulator and P.O.L. excess flow connector ready to connect to propane cylinder valve**
- * **Safety Valve Shielded from Burner Heat Throw Back**
- * **Name Plate are Preserved by mounting on Vertical Surface**
- * **Easy Serviceability - all orifices are easily cleaned**



ISO 9001-2008

**3070 Lenworth Drive
Mississauga ON L4X 2G1**

**Phone: 888-229-6064
Fax: 905-625-0383**

www.vulcandemo.com