

NEW: HS TRASH PUMPS

Durable trash pumps in two sizes—a 1HP 3-inch discharge and a 1/2HP 2-inch discharge. Both designed to pump sand, solids and debris with minimal wear and clogging.


HS Features

- Built-in shaft mounted agitator suspends solids.
- Urethane Semi Vortex Impeller for maximum durability and pump performance.
- Double Inside Mechanical Seal With SiC faces provides longest operational life.
- Oil Lifter provides lubrication of the seal faces. (Patent Pending)
- V-Ring Seal Protector protects mechanical seal from abrasive particles.

Optional Accessories

- Vertical Discharge Coupling.
- 2-inch NPT coupling available for HS3.75S-61.

New! 3-inch discharge

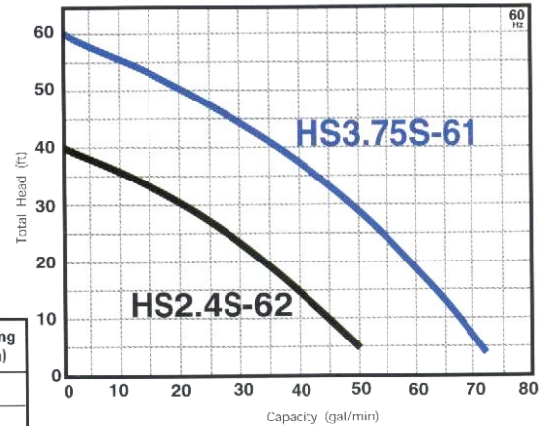

Model	Discharge Bore (inch)	Ship Weight (lb.)	Cable Length (ft.)	Dimensions (inch)		Continuous Running Water Level (inch)
				Diameter	Height	
HS2.4S-62	2	25	20	10	13	3 1/2
HS3.75S-61	3	42	32	12 1/2	15 1/4	3 1/2

NEW: HSZ AUTOMATIC TRASH PUMP


Automatic trash pumps in two sizes, designed to pump sand, solids and debris with minimal wear and clogging.

HSZ Features

- Built-in shaft mounted agitator suspends solids.
- Urethane Semi Vortex Impeller for maximum durability and pump performance.
- Double Inside Mechanical Seal With SiC faces provides the longest operational life.
- Oil Lifter provides lubrication of the seal faces. (Patent Pending)
- V-Ring Seal Protector protects mechanical seal from abrasive particles.

Optional Accessories

- Vertical Discharge Coupling.
- 2-inch NPT coupling available for HSZ3.75S-61.

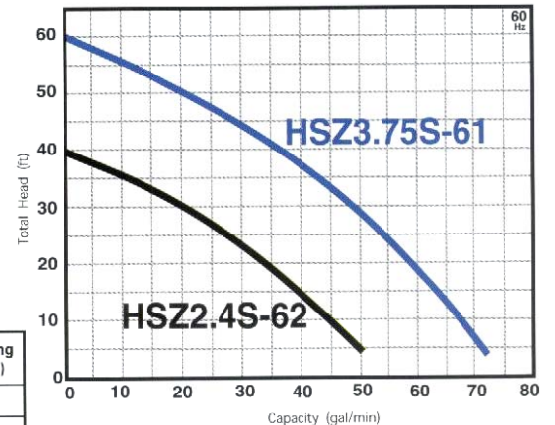

Model	Discharge Bore (inch)	Ship Weight (lb.)	Cable Length (ft.)	Dimensions (inch)		Continuous Running Water Level (inch)
				Diameter	Height	
HSZ2.4S-62	2	25	20	10	13	3 1/2
HSZ3.75S-61	3	42	32	12 1/2	15 1/4	3 1/2